

SDA 12/14 Series




Engineering Data

Model	Stroke(mm)	Max.Energy / Cycle (Nm)	Max.Energy / Hour [Nm/h]	Effective Weight (kg)	Recoil Force (N)		Weight (g)
					Ext.	Com.	
SDA12-10(B)	10	16	30,500	1.5-333	3.6	9.8	55
SDA14-12(B)	12	18	38,000	1.8-400	4.9	11.4	80

Dimensions

Model	Stroke	A	B	C	D	E	F	G	H	M	Dr
SDA12-10(B)	10	84	1.2	62.8	10	74	Ø 10.3	Ø 10.5	-	M12X1.0	Ø 4
SDA14-12(B)	12	96	1.2	72.8	10	86	Ø 12	Ø 10.5	12.5	M14X1.5	Ø 4

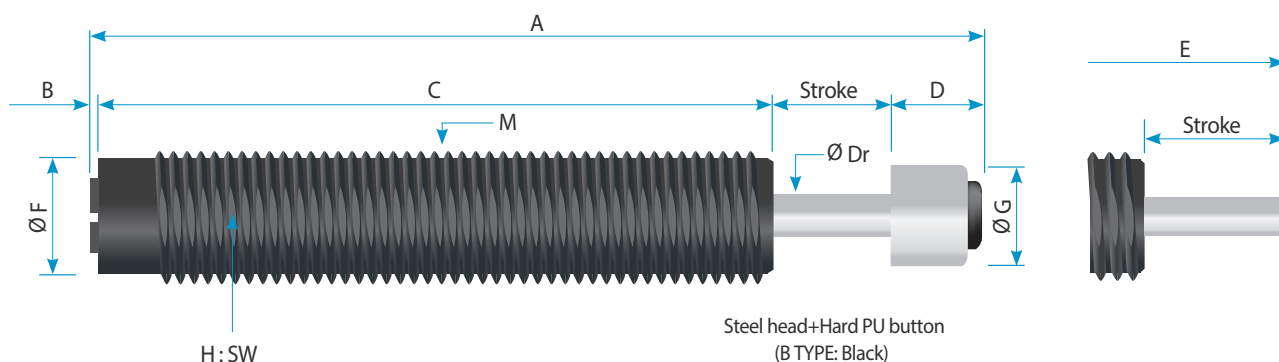

Accessories

Model	Stop Collar				Side Load Adapter					Clamp Mount						Lock Nut		
	A1	A2	A3	A4	B1	B2	B3	B4	B5	C1	C2	C3	C4	C5	C6	D1	D2	D3
SDA12-10(B)	20	8	Ø 13.8	M12X1.0	12	17.5	10	M12 X 1.0	Ø 5	20	16	32	12	M12 X 1.0	M5 X 18L	14	M12X1.0	4
SDA14-12(B)	27	12	Ø 18	M14X1.5	14	19.5	12	M14 X 1.5	Ø 6	20	20	32	12	M14 X 1.5	M5 X 25L	19	M14X1.5	5

