

# SDS 20/25 Series




## Engineering Data

Model	Stroke (mm)	Max.Energy / Cycle (Nm)	Max.Energy / Hour (Nm / h)	Effective Weight (kg)			Recoil Force (N)		Weight (g)
				S	M	H	Ext.	Comp.	
SDS20-20(B)	20	96	55,000	9-59	48-192	133-4,800	8.1	23	135
SDS25-25(B)	25	205	69,000	33-209	103-1,139	641-10,250	11	29	255

## Dimensions

Model	Stroke	A	B	C	D	E	F	G	H	M	Dr
SDS20-20(B)	20	118.5	8	77	13.5	105	Ø 17	Ø 13.5	17	M20 X 1.5	Ø 6
SDS25-25(B) SDS25-25F(B)	25	141.5	9	91	16.5	125	Ø 22	Ø 16	25	M25 X 2.0 M25 X 1.5	Ø 8

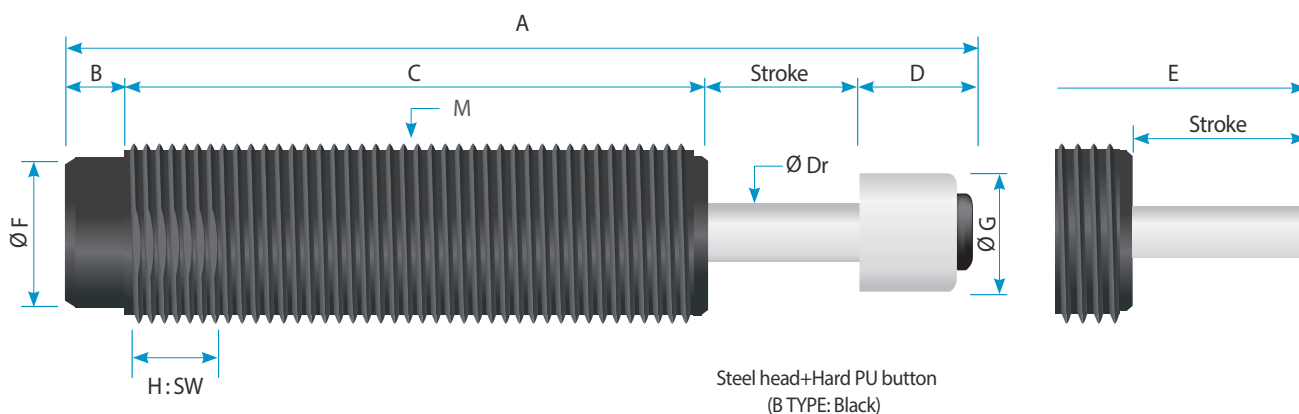

## Accessories

Model	Stop Collar				Clamp Mount						Lock Nut		
	A1	A2	A3	A4	C1	C2	C3	C4	C5	C6	D1	D2	D3
SDS20-20(B)	36	15	Ø 24	M20 X 1.5	28	25	40	20	M20 X 1.5	M6 X 30L	24	M20 X 1.5	6
SDS25-25(B) SDS25-25F(B)	42	18	Ø 31.5	M25 X 2.0 M25 X 1.5	32	32	46	25	M25 X 2.0 M25 X 1.5	M6 X 35L	32	M25 X 2.0 M25 X 1.5	8

