



G110 Series

OEM Machine Builder Products

DESTACO's Robohand G110 pneumatic grippers offer affordable gripper solutions that match the price and performance expectations for machine builders and OEM markets.

The G110 series family of grippers include 20 model sizes with varying stroke options. An extended jaw option is offered that is finger compatible with competing products for easier upgrades.

Engineered to provide better performance, lower maintenance and faster operation, the Robohand OEM solutions deliver high on value for cost sensitive applications.





Product Highlights/Options

- 20 models of grippers
- Bore sizes: 8, 11, 18, 25mm
- Strokes from 5mm to 50mm
- Drop-in replacement





Features, Markets and Applications



- Designed for OEM machine builders
- Existing OEM designed gripper fingers are interchangeable from competing units



- Very smooth gripping and linear operations
- High grip force and slide payload capacity
- Precision placement for pick and place applications



- Tested for millions of cycles
- Easy installation with quick start kits
- Easy field adjustments for fine tuning















tel: 800 237 3472 cesehsa.com.mx GR G110-F 0618 US



G110 Series OEM Machine Builder Products

G110 Series

OEM Pneumatic Parallel Grippers


- 20 different models sized to match your application needs
- Fast actuations from 60ms
- Multiple stroke options from 5mm to 50mm
- High grip force, small package from 56N to 558N [13 to 125 lbf]
- Shielded design for clean to moderate manufacturing environments
- Interchangeable gripper fingers with competitive units using extended jaw option
- Locating sleeves for precise finger mounting included with gripper

| Specifications | Units | All Sizes |
|-------------------------------------|-----------|----------------------|
| Pressure Range | bar [psi] | 3-7 [40-100] |
| Temperature Range (Buna-N Seals) | °C [°F] | -35°~80° [-30°~180°] |
| Accuracy | mm [in] | ±.05 [0.002] |
| Repeatability | mm [in] | ±.05 [0.002] |
| Valve Required to Actuate | | 4 way 2 position |



| | Total Rated | Stroke Availability | | | | | | | | | | | |
|------|----------------|---------------------|-----|------|------|------|------|------|------|------|------|------|------|
| Size | Grip Force | 5mm | 6mm | 10mm | 12mm | 15mm | 18mm | 20mm | 24mm | 25mm | 30mm | 40mm | 50mm |
| M80 | 56N [13 lbf] | • | | • | | • | | • | | • | | | |
| 11M | 104N [23 lbf] | • | | • | | • | | • | | • | | | |
| 18M | 260N [58 lbf] | | • | | • | | • | | • | | • | | |
| 25M | 558N [125 lbf] | | | • | | | | • | | | • | • | • |

How To Order

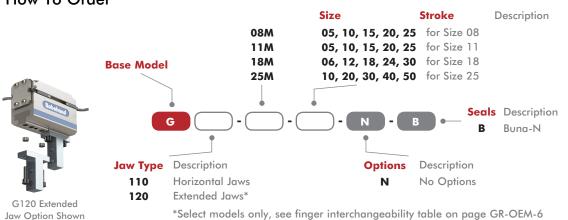

Dimensions and technical information are subject to change without notice.

+49-6171-705-0 europe@destaco.com uk@destaco.com

GERMANY

Tel: +33-4-7354-5001 france@destaco.com

UNITED KINGDOM +44-1902-797980

spain@destaco.com

+34-936361680

NETHERLANDS

+31-297285332 benelux@destaco.com

+86-21-6081-2888 china@destaco.com

THAILAND

+66-2-326-0812 asia@destaco.com

+91-80-41123421-426 india@destaco.com

MÉXICO





info@cesehsa.com.mx 800 237 3472

+1-888-DESTACO +1-248-836-6700 northamerica@destaco.com

GR G110-F 0618 US